

Fluid Technologies

UCON™ Refrigeration Compressor Lubricants

Enhanced Compressor Lubricants from DuPont™.

DuPont™ offers a broad portfolio of fluid technologies to ensure the safe and efficient operation of today's demanding motor vehicle systems. This portfolio includes performance fluids and lubricants that are supplied worldwide, including mobile air conditioner compressor lubricants and brake fluids.

DuPont™ is a leading provider of the key raw materials used to produce the Dow Automotive Systems polyalkylene glycol (PA G) compression lubricant technology, including glycol ethers, glycols, and polyglycols. This, combined with application expertise developed over the 50 years we've supplied automotive fluids, enables us to provide OEM and after-market customers with solutions that meet or exceed performance and cost targets.

Performance benefits

- High miscibility in the refrigerant (R-134a)
- Excellent lubricity
- High viscosity indexes
- Good oxidative, thermal and chemical stability
- Solubility can be customized for specific applications
- Outstanding long-term durability
- Compatibility with elastomers, including hydrogenated nitrile butadiene rubber and neoprene
- Low pour points
- Low toxicity, good biodegradability for low-viscosity PA Gs
- PAGs are hygroscopic relative to mineral oils and can be dried to below 100 ppm
- Superior total acid number (TAN)

Applications


- Mobile air compressors for OEMs and the aftermarket
- Compressor lubrication
- Assembly lubricant
- Air conditioning recharges



Product advantages and ROI

- Wide range of compatibility with a variety of air compressor technologies
- Unique formulation rivals performance of double end-cap products at a lower price
- PAG lubricity provides inherent polarity and a natural affinity for metal surfaces
- High viscosity indexes maintain viscosity in hot compressor and demonstrate excellent low temperature flow properties
- Our own raw materials resource enables improved cost efficiencies, reliable product supply, guaranteed quality standards
- More than 50 years of industry experience enables the development of products with outstanding performance properties

Typical PAG Miscibility in Refrigerant R-134a
 A Key Design Requirement for A/C Compressors

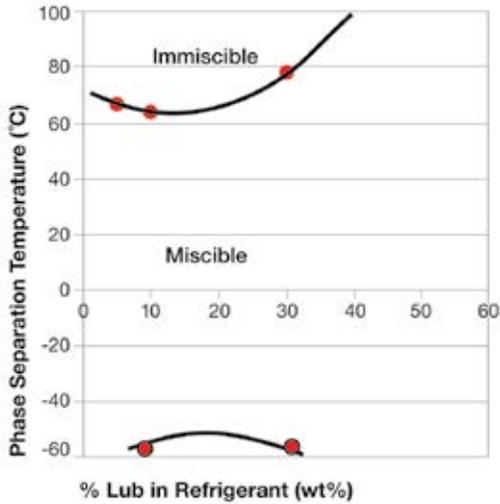

Typical Properties† – DuPont™ Compressor Lubricants
 for OEM and Aftermarket R134a-based Systems

Lubricant	Viscosity @ 40 °C cSt	Viscosity @ 100 °C cSt	Extreme Pressure (lb)	Upper Miscibility ¹ (°C)	Viscosity Index	TAN ²
RL-100	97	20	3000	45	225	1.09
RL-213	46	9	1200	75	180	< 0.05
RL-488	132	26	2700	47	235	0.57
RL-897	62	12	1200	74	185	< 0.05
RL-993	78	16	2900	51	215	1.17

† Typical properties are not to be construed as specifications.
¹ Separation temperature at 3% lubricant by weight
² mg KOH / g sample

dupont.com



Transportation & Industrial

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2019 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.