



DUPONT™ SOLAMET® PV20A

PHOTOVOLTAIC METALLIZATION

PRODUCT DESCRIPTION

DuPont™ Solamet® PV20A photovoltaic metallization front side paste is a highly conductive silver composition with innovative material science which enables finer line design and excellent printability. This paste is able to be co-fired with back side (p-type) aluminum conductors such as DuPont™ Solamet® PV3xx and DuPont™ Solamet® PV5xx tabbing silvers. It is designed for rapid dry and fast (spike) firing.

PRODUCT BENEFIT

- Improved efficiency over DuPont™ Solamet® PV19x series
- Superior metallization contact on LDE and PERC
- Excellent ink transfer capability at versatile fine line design
- High electrical conductivity after firing
- Reduced carrier recombination at Ag/Si interface
- Optimized for low stress and high soldered adhesion with excellent solderability
- Fast drying and firing
- Cadmium free*

*Cadmium “free” as used herein means that cadmium is not an intentional ingredient in and is not intentionally added to the referenced product. Trace amounts however may be present.

PROCESSING SUMMARY

Application

- Standard screen print process

Printing

- Speed: 200 – 350 mm/sec

Screen Type

- 325, 360, 380 and 430 mesh stainless steel (SS) preferred for <40µm*
- High open ratio screens with heavy calendar preferred for <35µm*

*Narrow side of screen pattern

	(I)	(II)	(III)	(IV)
Mesh (stainless steel)	325	360	380	430
Wire Diameter (µm)	16	16	14	13
Mesh Thickness (µm)	17-30			
Emulsion Thickness (µm)	12 – 20			
Mesh Angle (degrees)	22 – 30			

Drying

- Vertical Dryer 170 – 230°C 10 minutes
- IR Belt Dryer 150 – 400°C 1 min

Flexible in accordance with industry practice. Actual settings to be determined by drier type

Typical Line Resolution

- 30 – 40µm* screen designed width

Soldering

- Compatible with industry standard material and condition.
- Flux type: non-clean, reactivity level L0/M0. (Standard: ANSI/J-STD-004)
- Ribbon: Compatible with Pb contained and Pb free solder material, i.e. 60Sn/40Pb, 62Sn/36Pb/2Ag, 96.5Sn/3.5Ag

TYPICAL PHYSICAL PROPERTIES

Viscosity (Pa.S) (Brookfield HBT, 20 rpm, SC4-14/6R utility cup and spindle, 15°C)	210-330
Solids (%) at 750°C	90 – 92
Fineness of Grind (4th / 50%)	≤12m / ≤6m
Resistivity (m Ω /sq/10m)	<5
Thinner	9450
Shelf Life (months)	6

PASTE PREPARATION

The composition should be thoroughly mixed before use to ensure good printing performance. Several pre-treatment methods are recommended: a) Hand mixing thoroughly. b) Thinky 60-180 sec, temperature controlled at 25-35°C. c) Jar rolling 12-48 hours under 30 rpm. Jar rolling over 48 hours is not recommended due to changes in rheological behavior. Care should be taken to avoid air entrapment.

PRINTING

Printing should be carried out in a clean, well-ventilated area. Solamet® PV20A photovoltaic composition (in its container) should be at ambient temperature prior to commencement of printing.




DUPONT™ SOLAMET® PV20A

FIRING

Solamet® PV20A is designed for rapid (spike) firing. To get the best electrical performance, PV20A should be fired at a peak temperature similar to Solamet® PV19x. Firing optimization is strongly recommended. See chart 1 for typical firing profile. Actual furnace settings and belt speed will depend on the wafer thickness, texturing and emitter resistivity as these influence the temperature of the wafer during firing. It is important that wafers are fired in a well-ventilated furnace with a continuous supply of clean, filtered air. Airflow and extraction rates should be optimized to ensure that oxidizing conditions exist within the furnace firing chamber especially when front and back side conductors are co-fired.

TYPICAL FIRING PROFILE

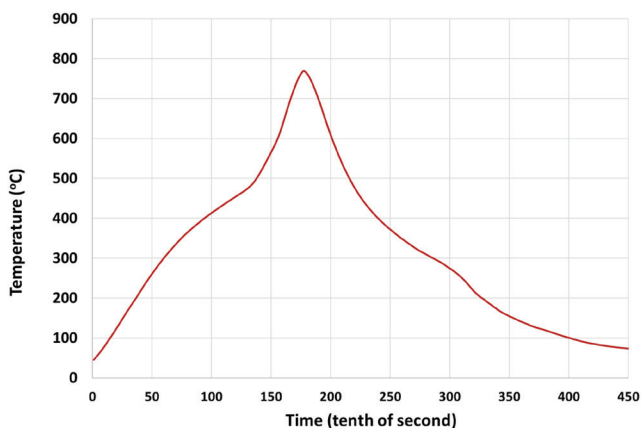

THINNER

Solamet® PV20A composition is optimized for screen printing and thinning is not normally required. Use the DuPont recommended thinner for slight adjustments to viscosity or to replace evaporation losses. The use of too much thinner or the use of a non-recommended thinner may affect the rheological behavior of the material and its printing characteristics. Please refer to Table 1.

STORAGE

Containers may be stored in a clean, stable environment at room temperature (between 5°C – 25°C) with their lids tightly sealed. Storage in high temperature (>25°C) or in freezers (temperature <0°C) is NOT recommended as this could cause irreversible changes in the material.

SAFETY AND HANDLING

For information on health and safety regulations please refer to the specific product MSDS

For more information on DuPont™ Solamet® PV20A or other DuPont microcircuit materials, please contact your local representative:

Americas

DuPont Microcircuit Materials

14 TW Alexander Drive
Research Triangle Park, NC 27709
USA
Tel +1 800 284 3382 (calls within USA)
Tel +1 919 248 5188 (calls outside USA)

Europe, Middle East & Africa

Du Pont (UK) Ltd

Coldharbour Lane
Bristol BS16 1QD
UK
Tel +44 117 931 3191

Asia

Du Pont Kubushiki Kaisha

MCM Technical Lab
DuPont Electronics Center
KSP R&D B213, 2-1,
Sakado 3-chome, Takatsu-ku, Kawasaki-shi,
Kanagawa, 213-0012
Japan
Tel +81 44 820 7575

DuPont Taiwan Ltd

45, Hsing-Pont Road
Taoyuan, 330
Taiwan
Tel +886 3 377 3616

DuPont China Holding Company Ltd

Bldg. 11, 399 Keyuan Road
Zhangjiang Hi-Tech Park
Pudong New District
Shanghai 201203
Tel +86 21 3862 2888

DuPont Korea Inc.

3-5th Floor, Asia tower #726
Yeoksam-dong, Gangnam-gu
Seoul 135-719, Korea
Tel +82 2 2222 5275

E.I. DuPont India Private Limited

7th Floor, Tower C, DLF Cyber Greens
Sector-25A, DLF City, Phase-III
Gurgaon 122 002 Haryana, India
Tel +91 124 409 1818

Du Pont Company (Singapore) Pte Ltd

21 Biopolis Road,
#06-21, Nucleos, South Tower,
Singapore 138567
Tel +65 6586 3022

mcm.dupont.com

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF DUPONT.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

CAUTION: Do not use in medical applications involving permanent implantation in the human body or contact with internal body fluids or tissues. For other medical applications, see "DuPont Medical Caution Statement," H-50102

Copyright © 2017 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, and all DuPont products denoted with ® or TM are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates. K-29540 (06/17)